

# PELLET STOVES

## CLEOPE



-  **FORCED VENTILATION**
-  **HERMETIC**
-  **NATURAL HEATING**
-  **WIFI BLUETOOTH**
-  **TOP FLUE OUTLET / TOP COAXIAL OPTIONAL**

### GENERAL CHARACTERISTICS


- Heating forced ventilation
- Cladding painted steel
- Top painted steel
- Stove airtight, steel
- Firebox steel
- Baffle plate Skamolex
- Brazier cast iron
- Door cast iron
- Aesthetic door steel
- Door handle painted steel, detachable
- Standard flue outlet position rear
- Optional flue outlet RH side - LH side - top - top coaxial
- EASY Remote control with LCD display yes
- Control panel with display and digital controls yes
- Power levels 5
- Ambient probe for temperature control standard
- Programmable timer-thermostat 6 daily time frames
- Warm air outlets front upper
- Humidifier yes
- Ceramic glass resistant up to 750°C
- Glass cleaning system continuous air flow
- Brazier cleaning intervals yes
- Pellet level indicator yes
- Removable ash drawer yes
- Module WiFi- Bluetoothfor App MYSUPERIOR standard
- Energy Saving yes
- Eco Function yes
- Night mode yes
- Pellet Quality System Function yes
- Air Combustion System Function yes
- Installation wall - corner

### PRODUCT NEWS

- Stove: airtight steel
- Module WiFi- Bluetoothfor App MYSUPERIOR
- Night mode
- Pellet Quality System Function
- Air Combustion System Function
- New top, cladding and door finish: NERO
- EASY Remote control with LCD display: optional
- Protection kit: optional
- Top flue kit: optional
- Top coaxial flue kit: optional

### Total price including stove and cladding

MODEL/COLOUR	CODE
Firebox with cladding	
BIANCO	S07620100C
BORDEAUX	S07620200C
NERO	S07620300C
ACCESSORIES ON REQUEST	CODE
EASY Remote control kit	N08013030C
Right-hand or left-hand side flue kit	N08011035C
Top coaxial flue kit	N08011031C
Top flue kit	N08011033C
Protection kit	S08012970C
Humidifier	N08019020C
Flexible pipe Ø 6 cm for combustion air	N08011017

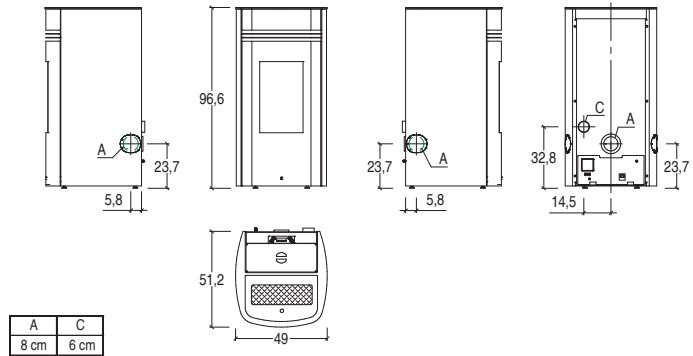

### TECHNICAL DATA

- Model CLEOPE
- Type SP450-01
- Energy efficiency class A+
- Room heating capacity m<sup>3</sup> 100 - 175
- Nominal heat output (min - max) kW 2,8 - 6,0
- Thermal efficiency (min - max) % 90,3 - 91,3
- Nominal consumption (min - max) kg/h 0,64 - 1,36
- Standard flue outlet Ø cm 8
- Hopper capacity kg 15
- Dimensions W x D x H cm 49,0 x 51,2 x 96,6
- Stove weight kg 85



**PIAZZETTA**  
FIREPLACES & STOVES

Piazzetta Australia  
12 Government Road Eden NSW 2551  
www.piazzetta.com.au  
sales@piazzetta.com.au  
02 64962277