


Arc Stand

This section details the process of building the stand and the correct installation of Arc Stand.



Cautions & Warnings

Cautions & Warnings

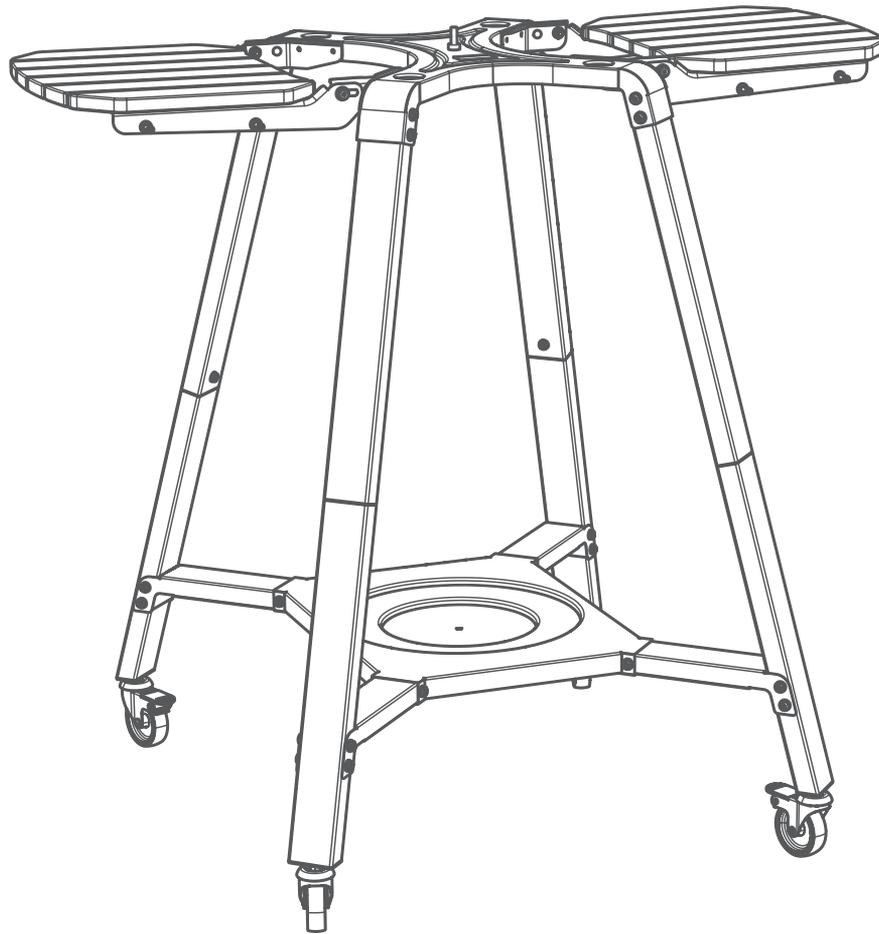

Ensure you have fully read, understood and comply with the cautions & warnings in the Arc Users Manual supplied with the oven.

—

All four of the casters should always be locked unless you are moving the oven.

—

Never attempt to move the oven when it is still warm, wait for it to fully cool first.

—

When moving the oven on the stand always push/pull from the stand and not the oven.

—

Remove anything loose from the stand and its shelves before moving it.


Placing hot items from the oven onto the wooden shelves may damage them, use appropriate protection to avoid damage.

—

Exposing the wood to direct sunlight and rain for extended periods can cause the protective layers to break down. To prevent this follow the below steps:

1. Store the unit out of sunlight when not in use.
2. Dry the wood with a soft cloth after exposure to moisture.
3. Apply an outdoor furniture oil treatment every 8 weeks.

Gas Oven

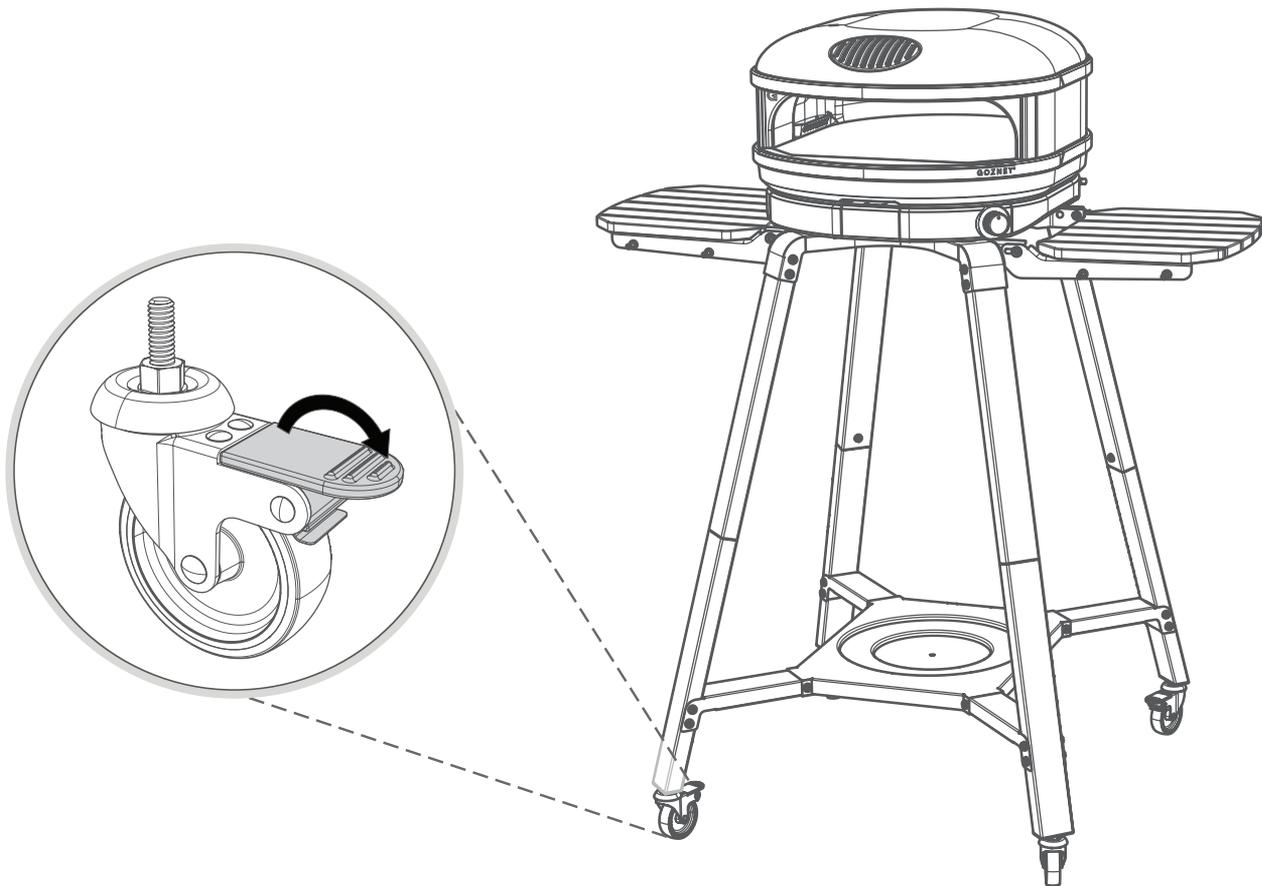

Always disconnect the oven from the gas supply before moving the oven.

—

The casters should always be locked when the oven is connected to a gas supply, even if the oven isn't in use.

—

Ensure you're using a Gozney supplied gas connector or one that complies with the Standard for movable gas appliances (ANSI Z21.69 / CSA 6.16), and a quick-disconnect device that complies with the relevant Standards (ANSI Z21.41 / CSA 6.9).


The gas connector and the quick disconnect device or its associated piping should never be used to limit the movement of the appliance.

This section details the process of building the stand and the correct installation of Arc Stand.



Building & Installation

Build Manual

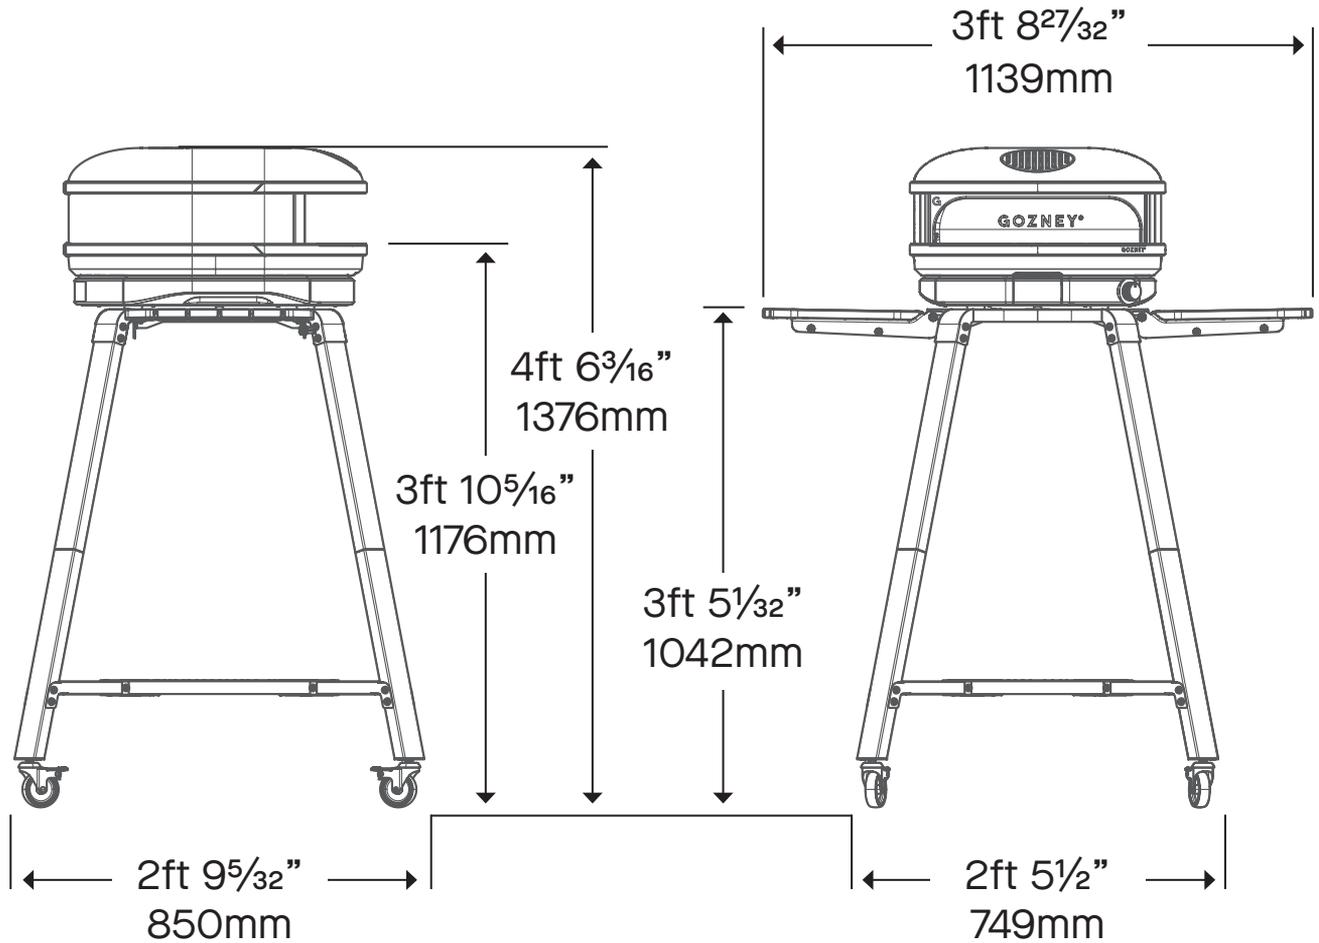


BUILD AREA

Build the stand in front of the area you intend to position Arc.

—
Ensure the ground is stable and level and capable of supporting the oven's weight.




—
Don't place any of the parts on an abrasive surface and avoid damaging the paintwork of the metal parts.

What's In The Box

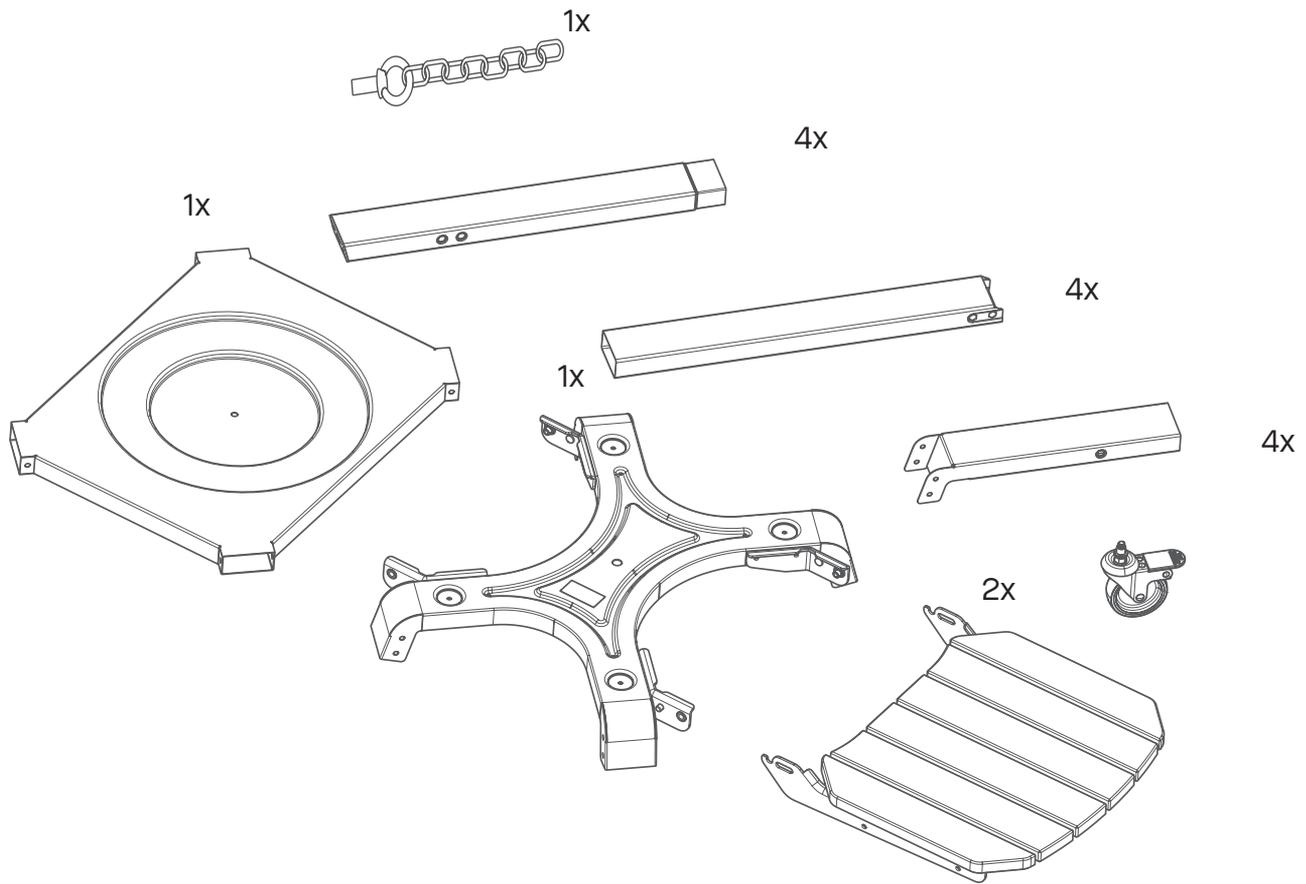


SCALE 1:1


F001	F002	F003	F004	F005	F006
M8×30	M6×14	M6×11	M8×8	M8	M6
Thumbscrew	Bolt	Bolt	Spacer	Washer	Washer
1x	44x	4x	1x	4x	44x

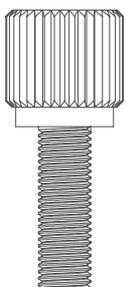



Step 1



F006
8x



F002
8x

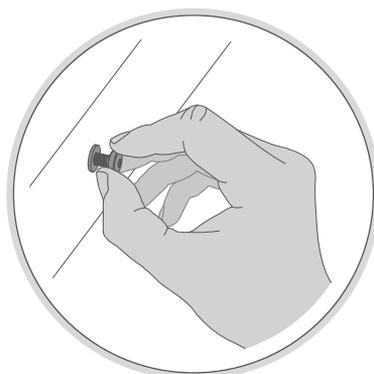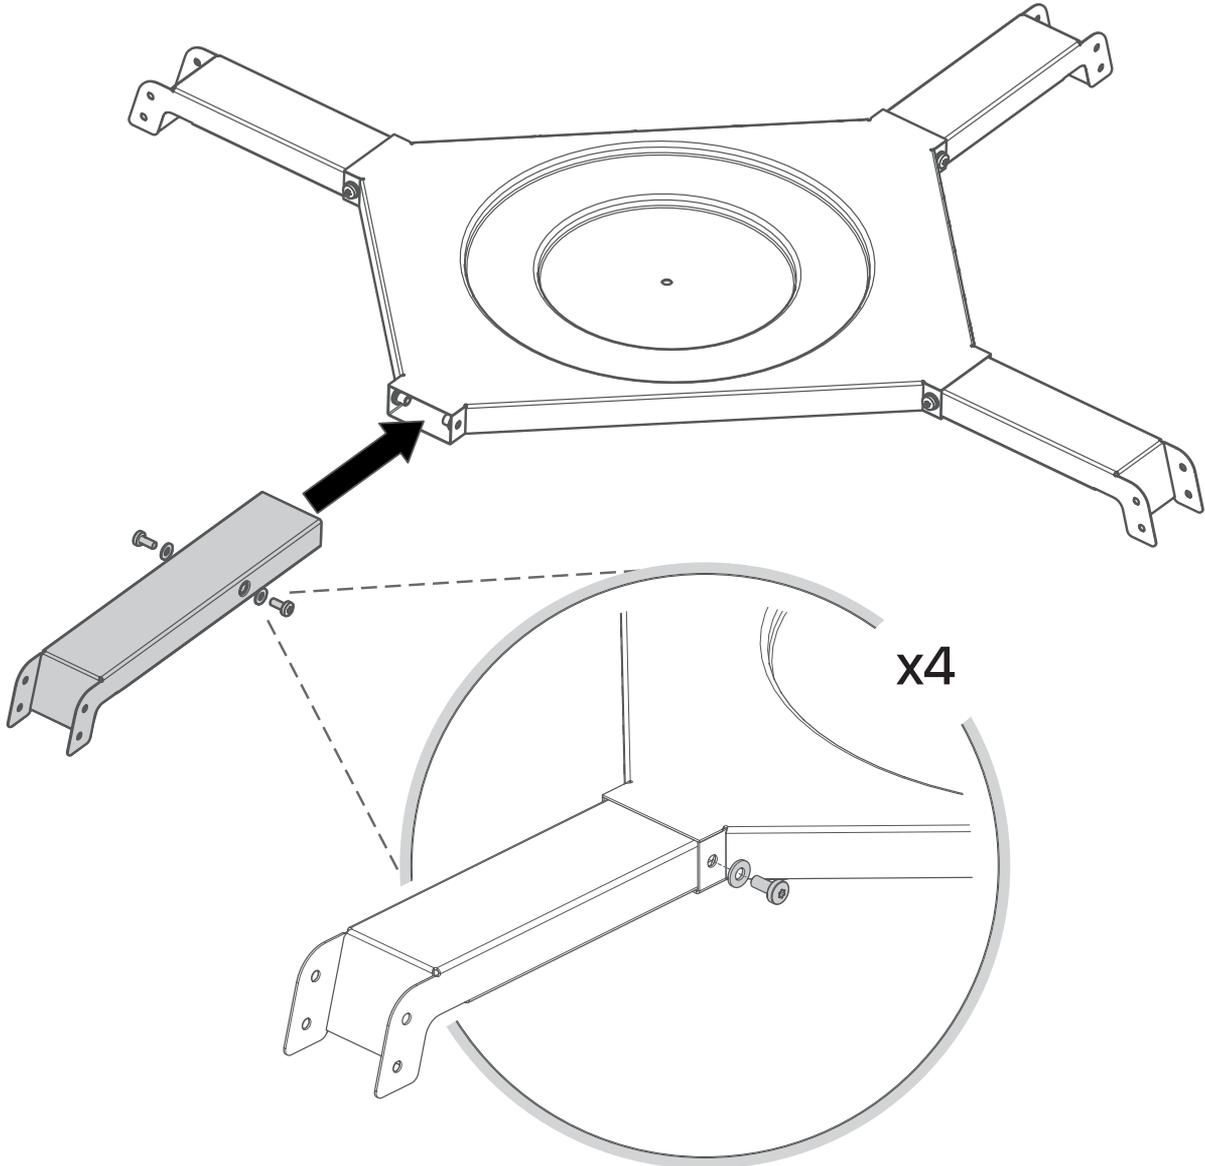


FIXINGS


We recommend not fully tightening the bolts until the frame has been assembled.

—
This will ease the alignment of future fixings. Fully tighten at Step 5.




Step 2





F006
16x



F002
16x

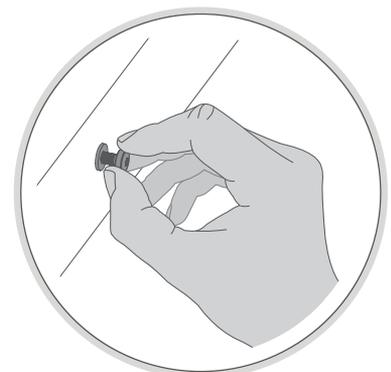
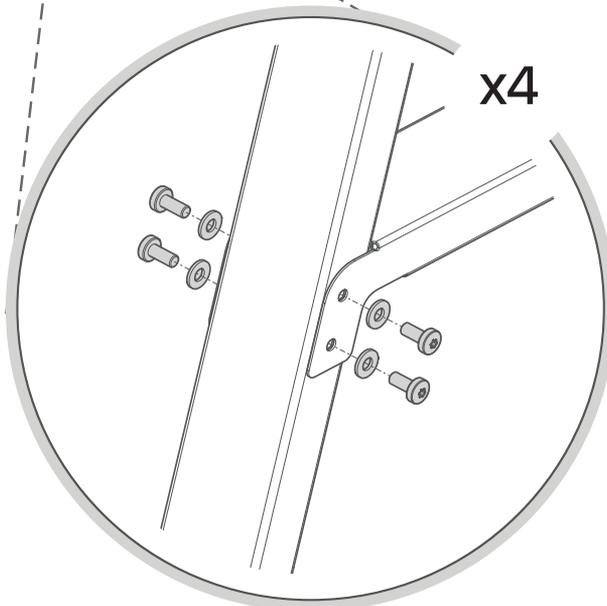
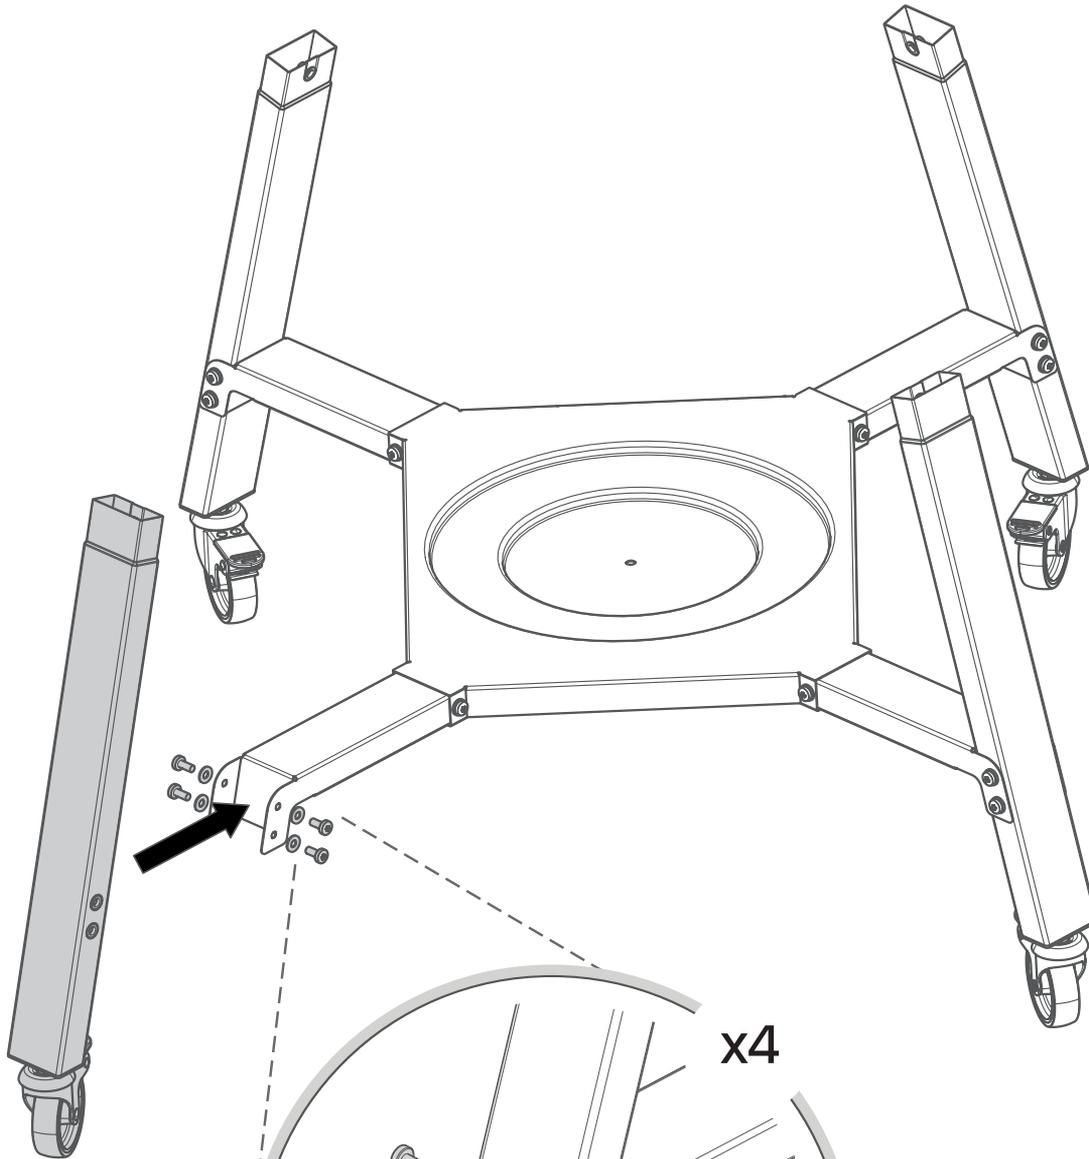


Step 3




F006
4x


F002
4x

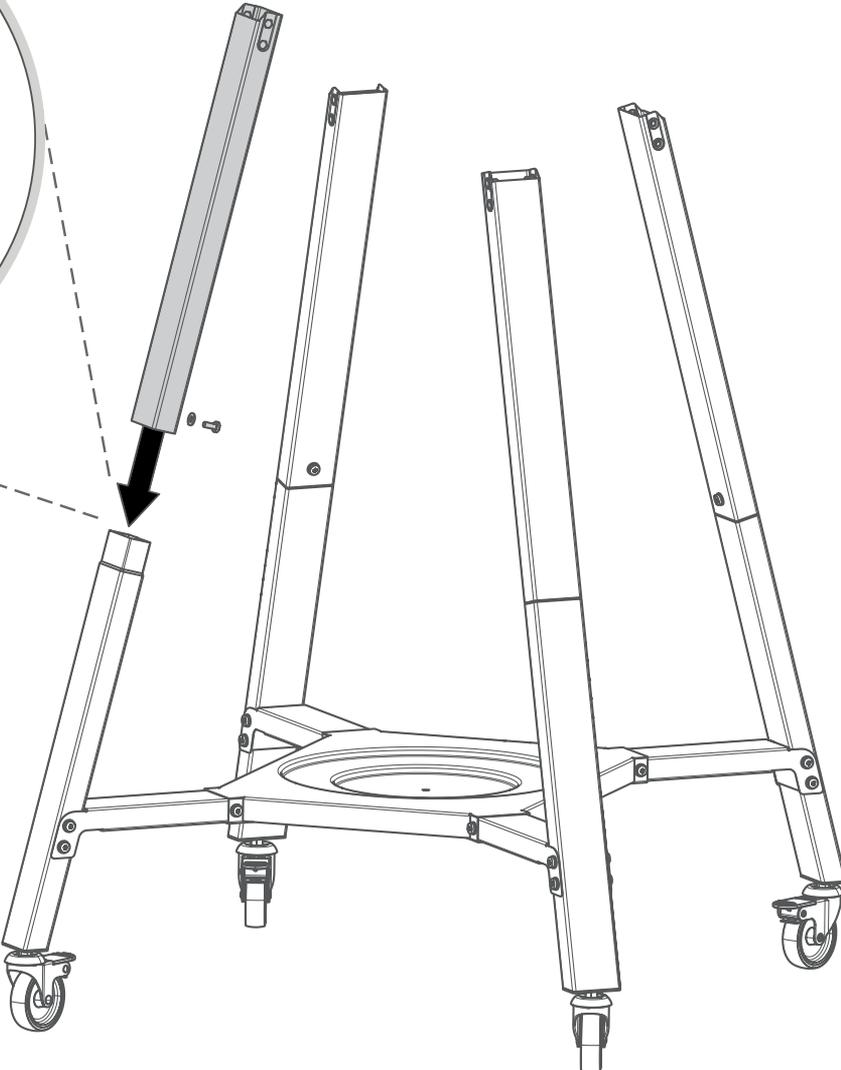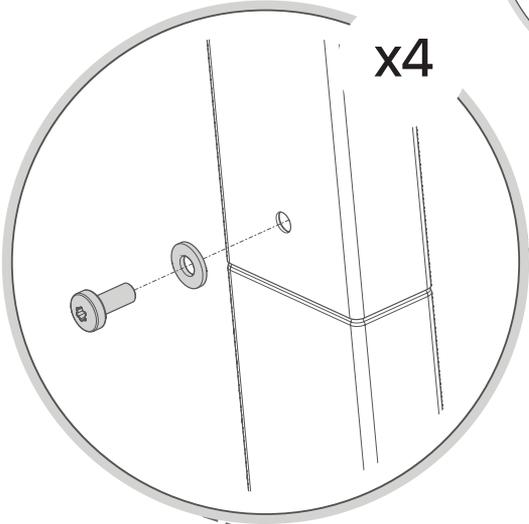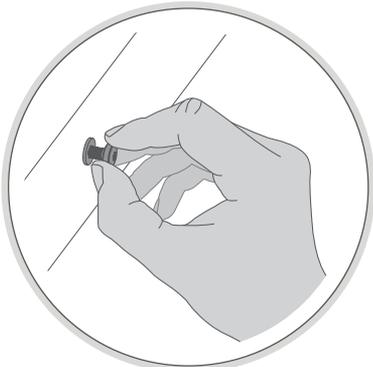




Step 4





F006
16x



F002
16x

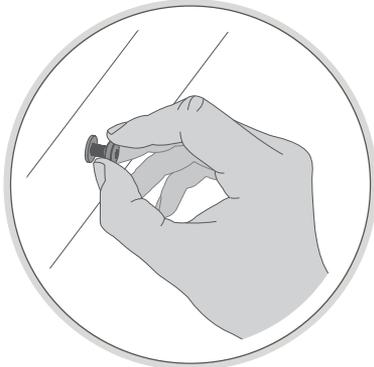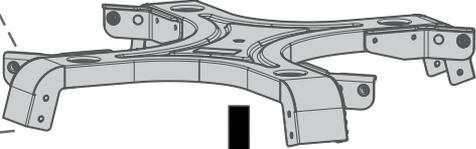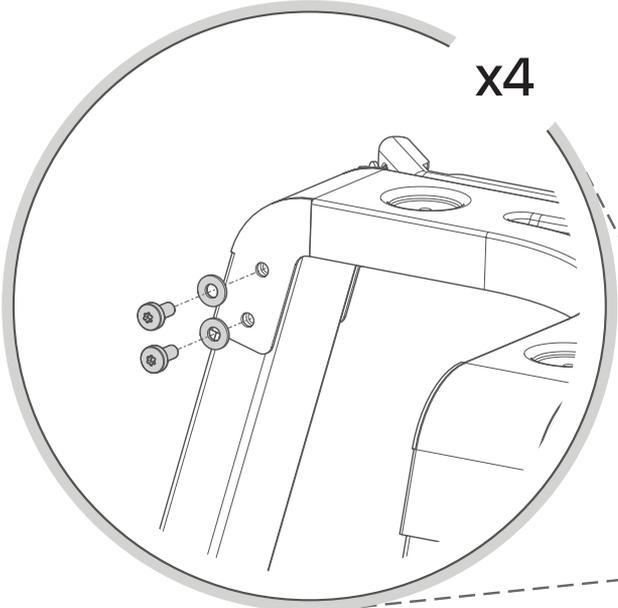



Step 5

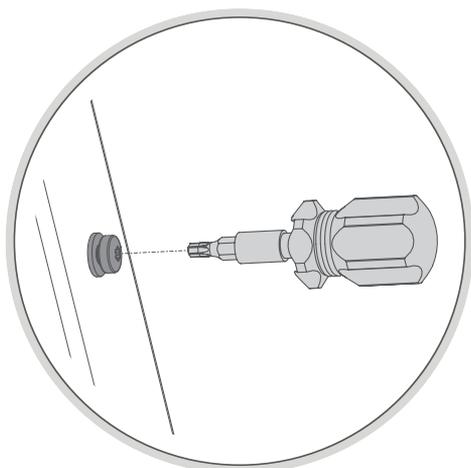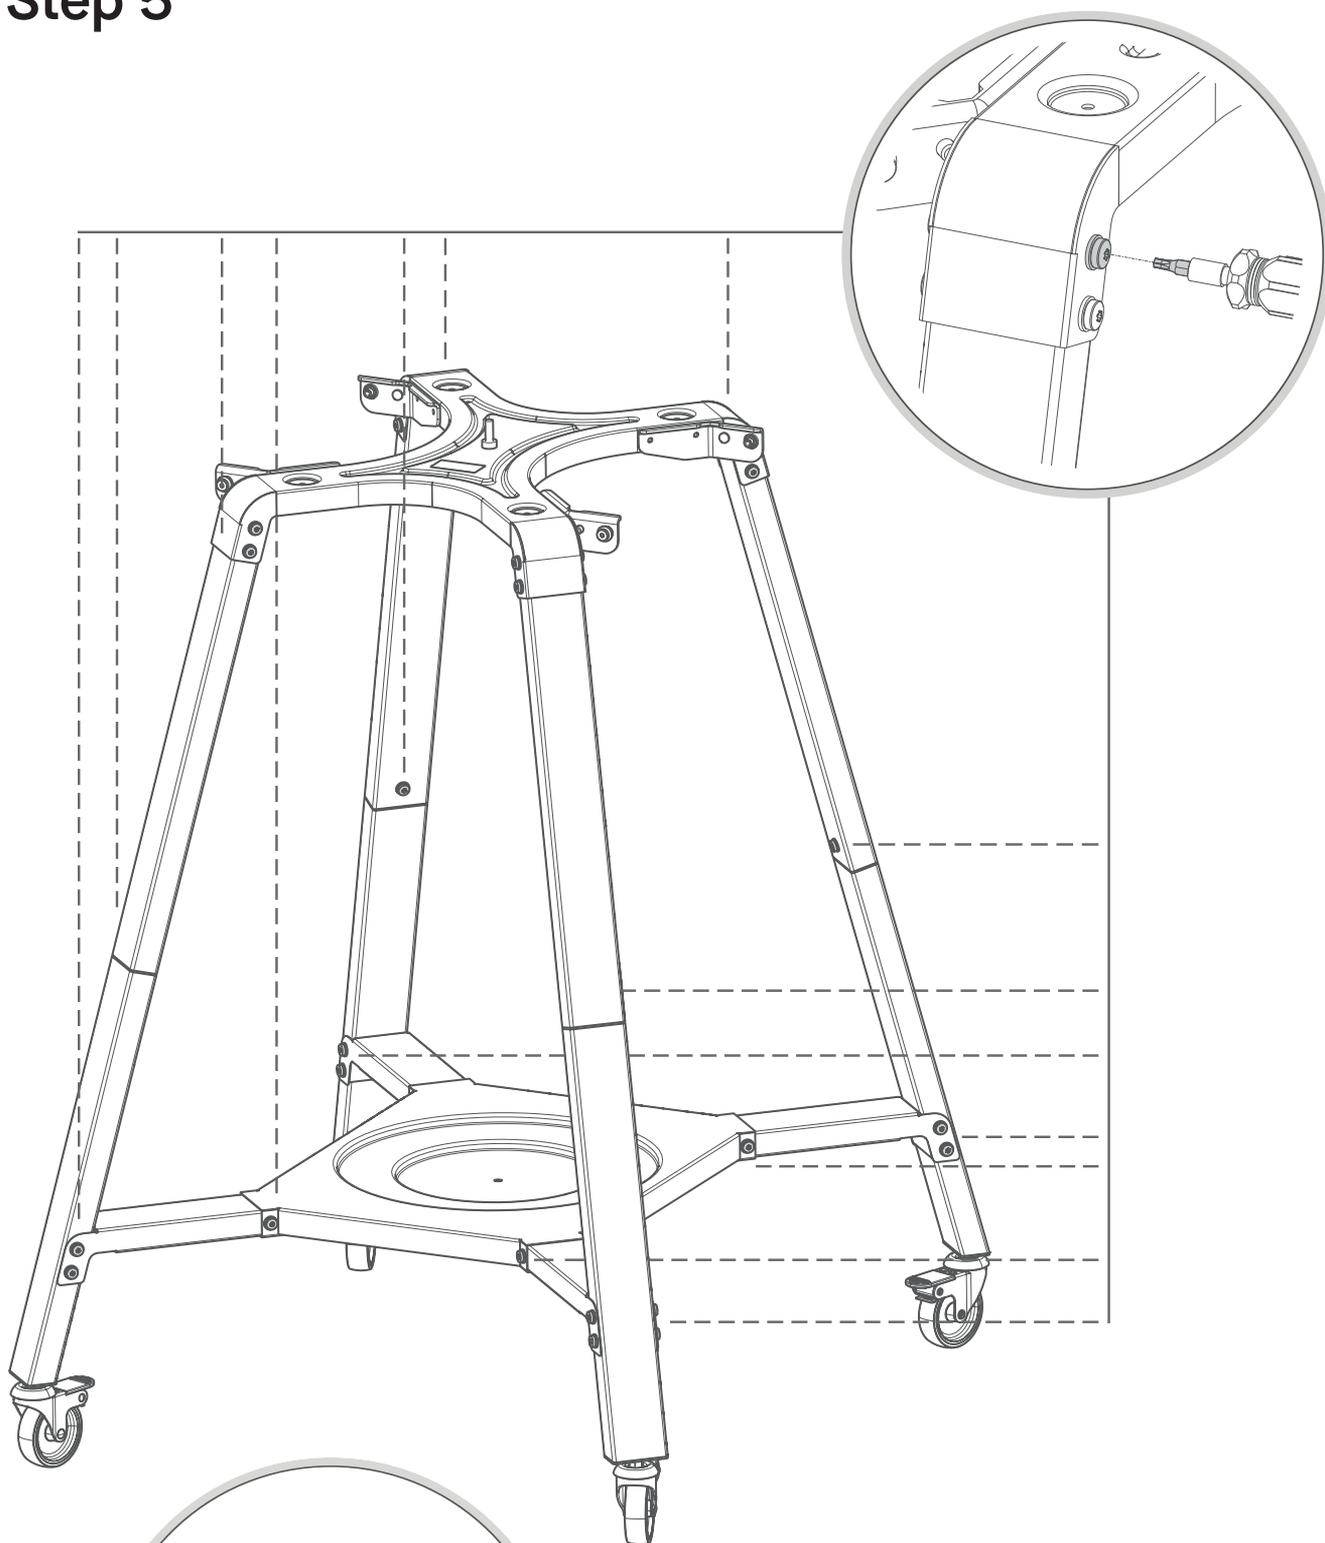

FIXINGS




Tighten all fixings on the stand. Ensure to only use hand tools to prevent overtightening.

Step 6






F005
4x


F003
4x

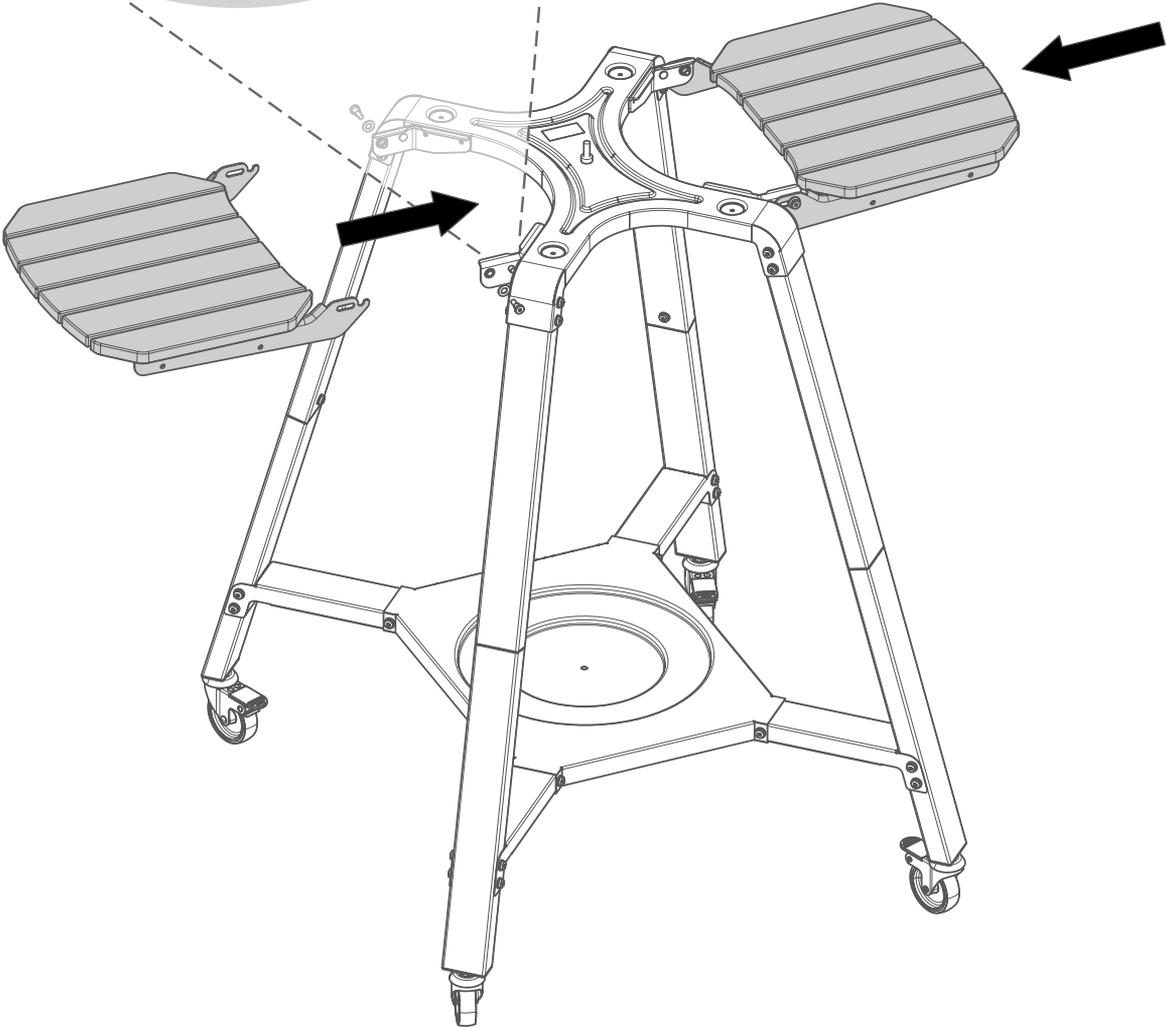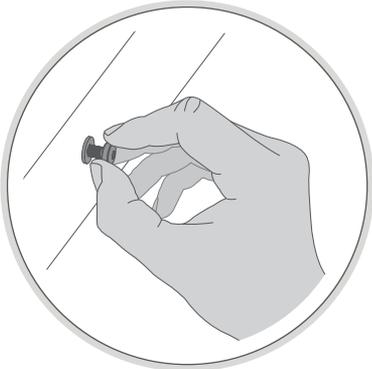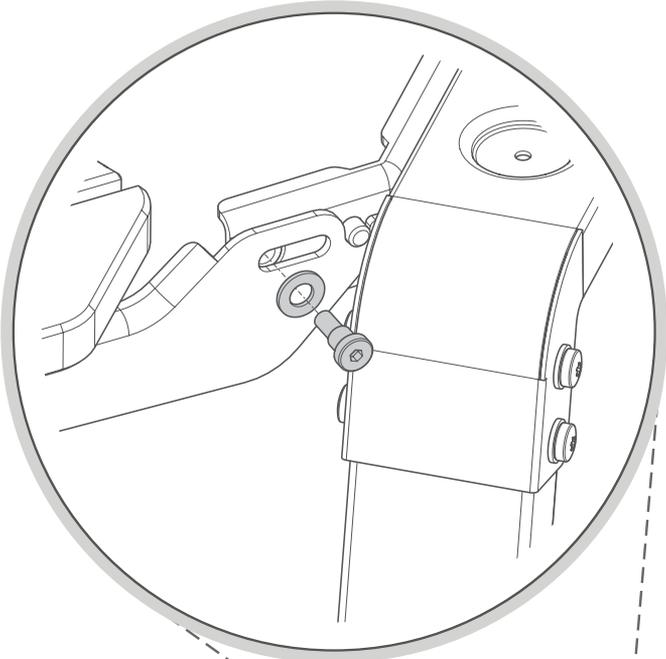

Step 7

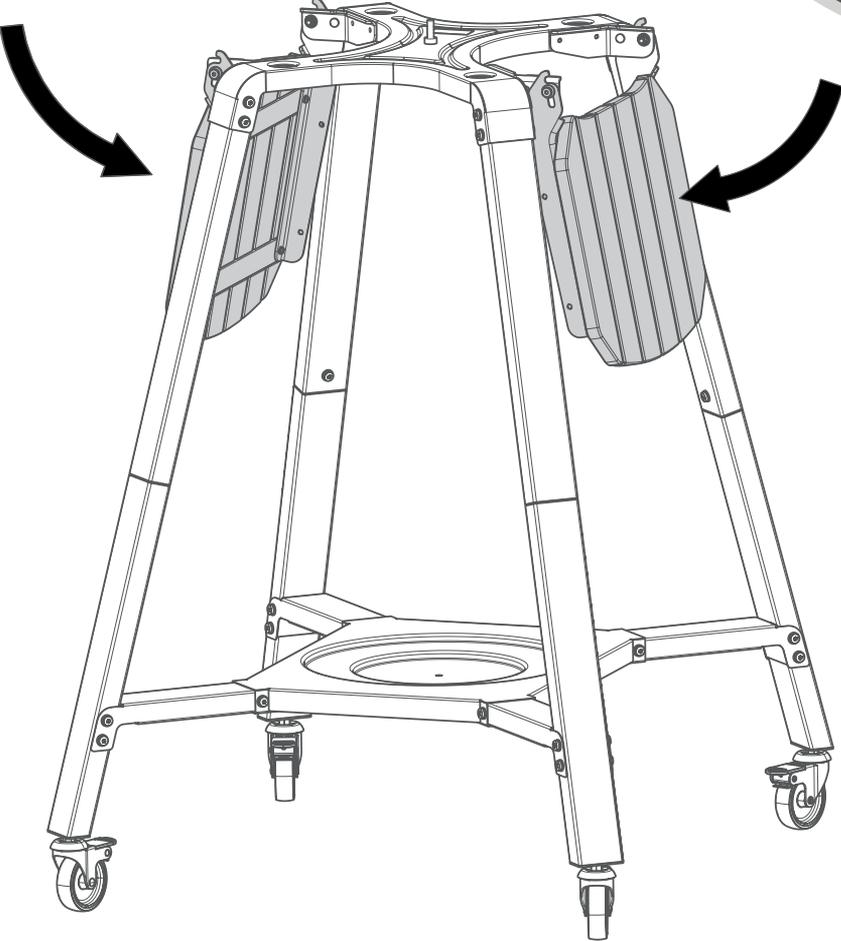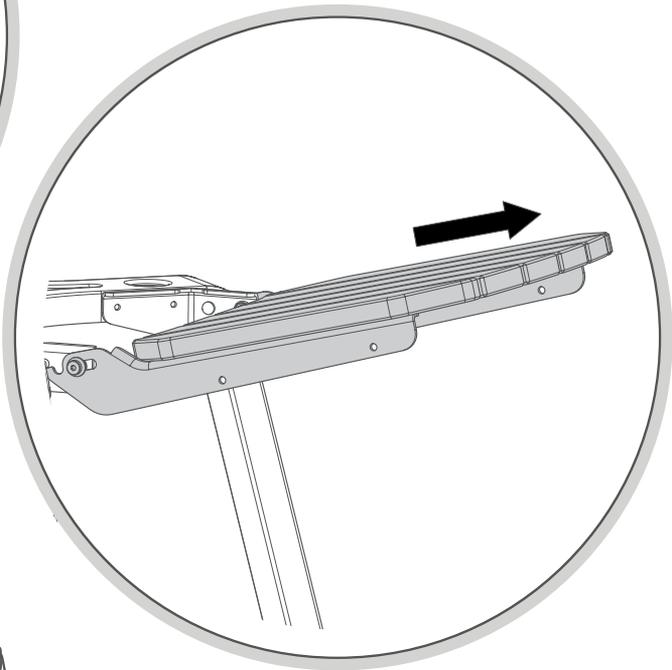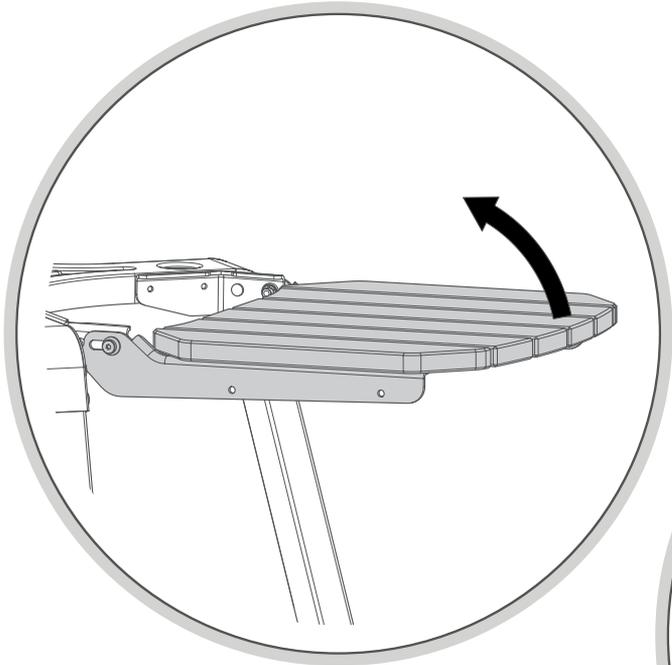


Step 8

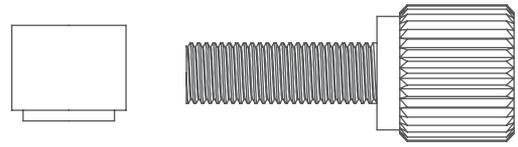

F004
1x


F001
1x

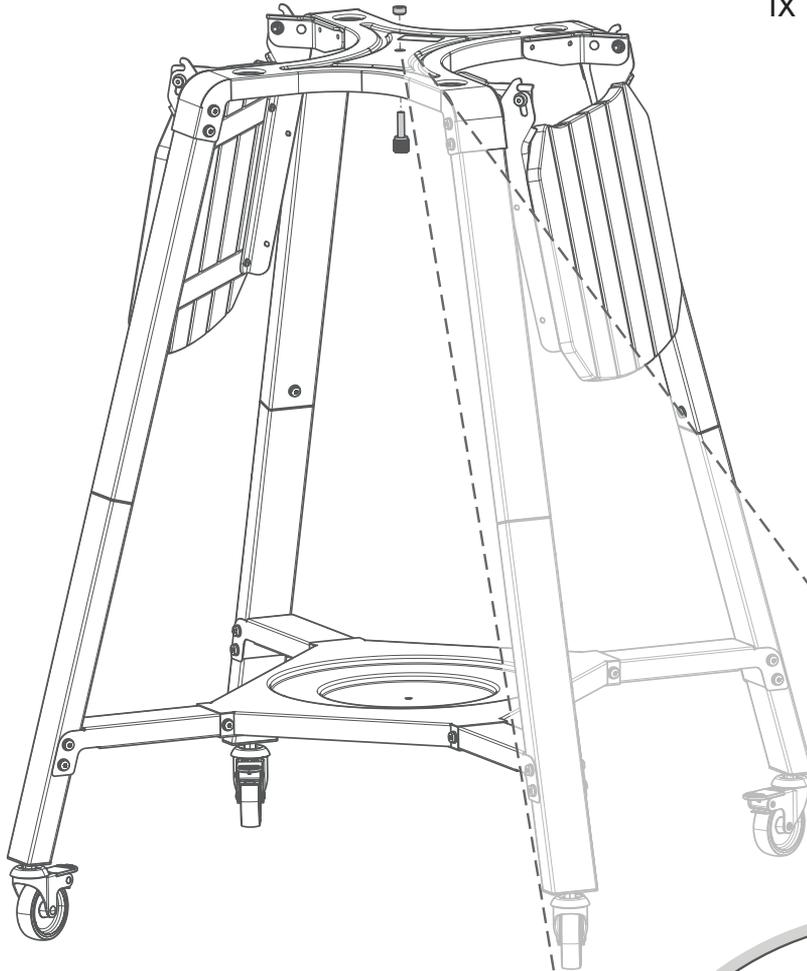

INSTALLING ARC

Before installing Arc, assemble fixings F004 and F001 into the top of the stand.

Don't fully tighten these two fixings, there needs to be around $\frac{1}{8}$ " (4mm) of thread exposed.

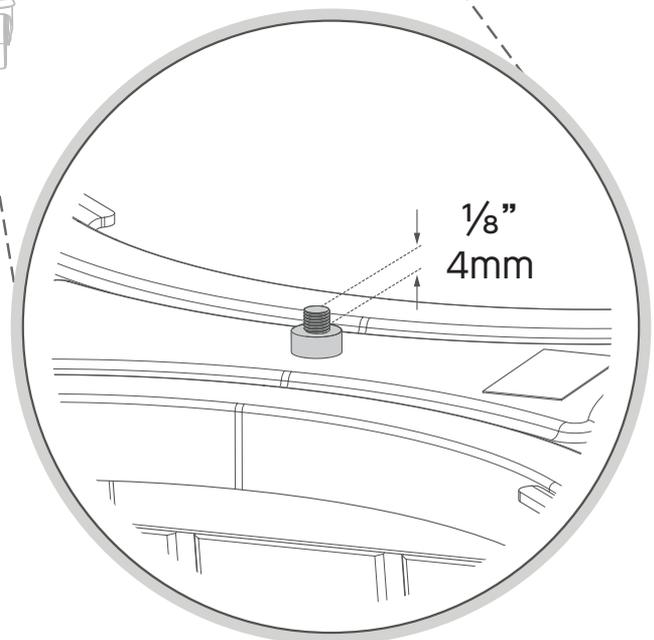

Step 9

INSTALLING ARC

Ensure fixing F004 and F001 are assembled into the stand before installing the oven.

—

Remove anything loose from the oven before moving.

—


Two people should pick up Arc from the rounded ends of the oven as shown.

—


Never lift Arc on your own.

—

Don't use the mouth of the oven as lifting point.

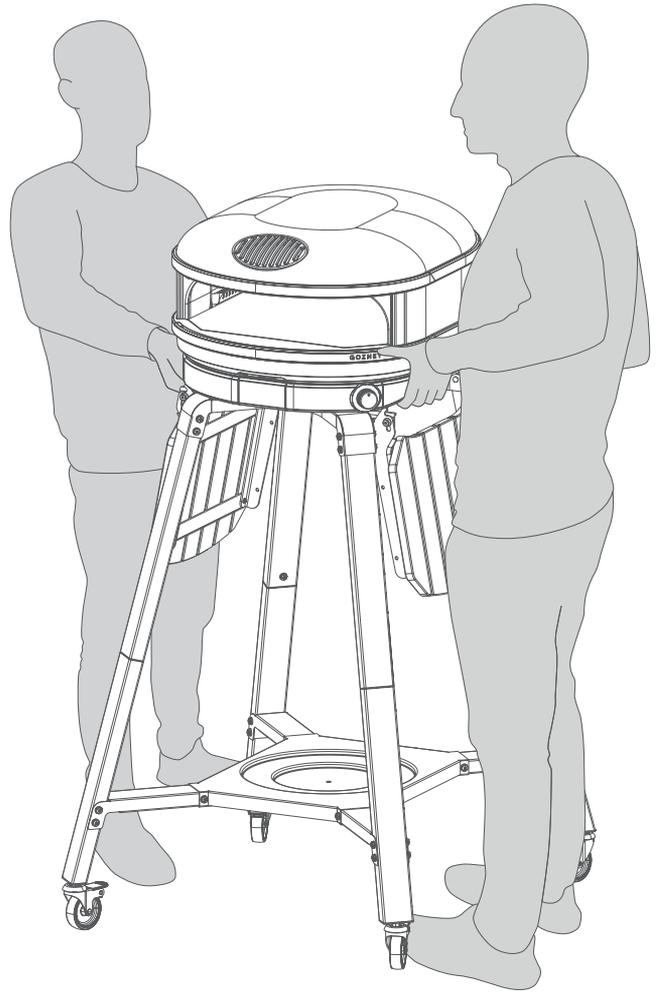

Align Arc's feet with the highlighted slots. Ensure the feet are fully aligned before moving on.

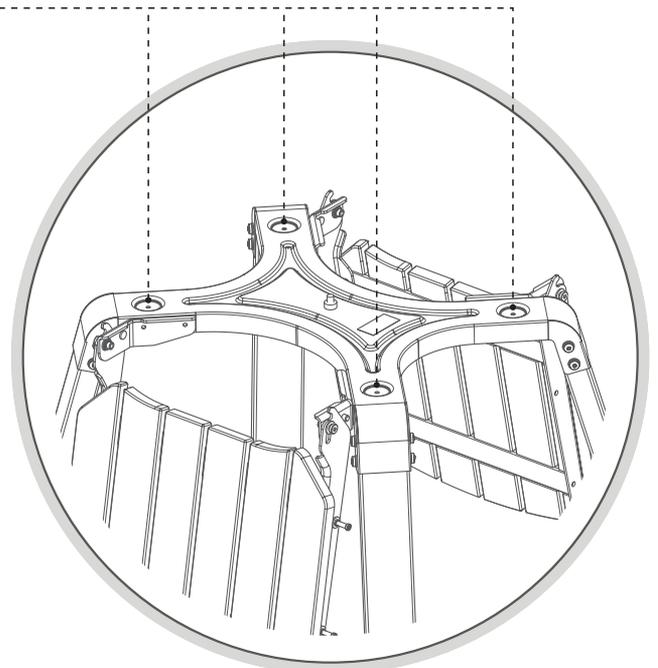

Step 10



WARNING

It is important for the safe usage of Arc or Arc XL that the gas bottle is secured to the oven as specified in the instructions below.

LPG BOTTLE SETUP

Remove F001 and replace with the eye bolt and chain that is in the box. The eye bolt needs to be rotated until it can rotate no further, this ensures it is securely installed.

Thread the chain through the handle of the gas bottle and clip it to either the eye bolt or the chain depending on the size of the bottle used. The chain needs to be taught to prevent the bottle from moving when on the stand.

To prevent stress on the components, ensure that the length of the chain doesn't not exceed 80% of the length of the hose assembly.

